




# FLUE COLLECTOR REINFORCEMENT BRACKET INSTALLATION

This document is a supplement to the Lochinvar installation instructions for the Flue Collector Reinforcement Bracket.


## Procedure

Use the Lochinvar guide to remove the heat exchanger from the top half of the Warmsource unit. There are only two additional steps that need to be made to the Warmsource that are not listed in the Lochinvar document. Those steps are listed here.

After performing the replacement ourselves, Warmboard estimates the entire procedure can be completed in less than 3 hours.

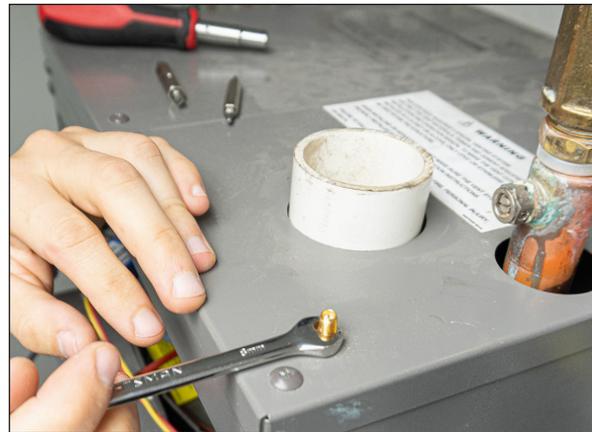

Use a 8mm wrench to remove the antenna connection.

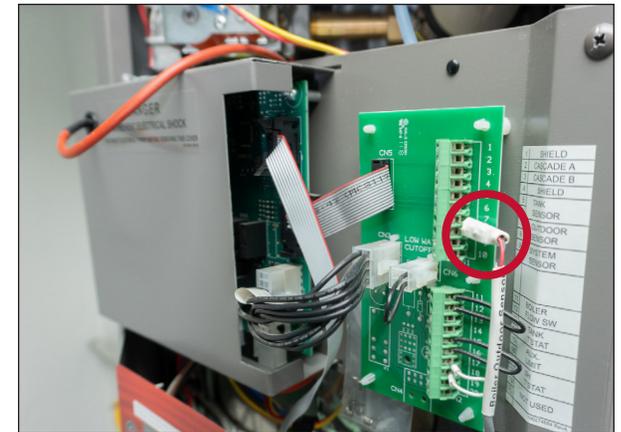

Remove the SRC boiler cable from the Outdoor sensor terminals (7, 8).